

# Assembly Information for PAL 2VA Vinyl Liner Adaptor Kit


Step 1. Locate the position for mounting the PAL-2R fitting at the centre of one end of the pool or the centre of both ends if required. If the pool is an irregular shape the fitting should be located in a position to obtain the best light spread in the pool. The fitting should be placed 300mm below the water level or 450mm below the top of the pool coupling to provide the best illumination of the water and enable the retractable part of the fitting to be taken out of the pool if the lamp in the PAL-2R has to be replaced.



Step 2. Fit Mounting Plate & Light Seal over hole as shown.



Step 3. Place a bead of silicon between the nut and the wall then tighten up the nut firmly. Fit Vinyl Liner Seal to front of Mounting Plate as shown.

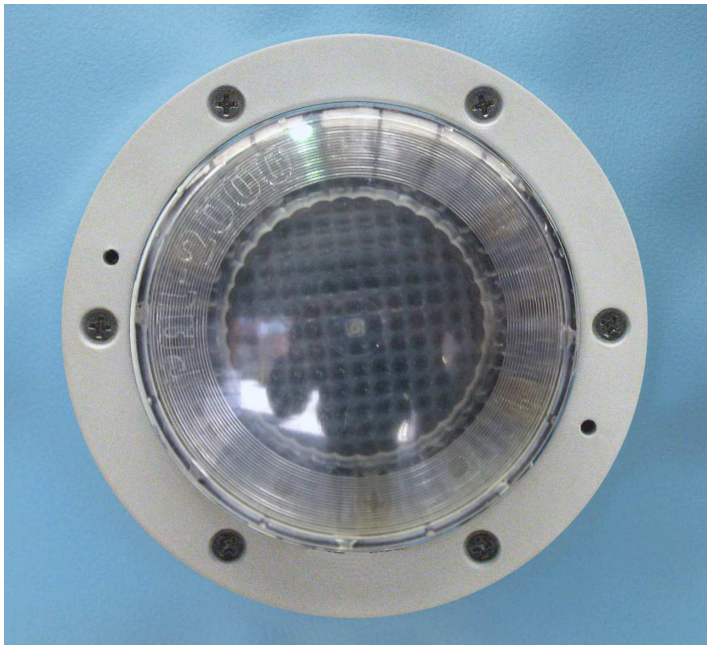

Step 4. Cut vinyl liner around hole and fit the clamp ring with the 6 x 316 Grade Stainless Steel Screws supplied.



Step 5. Fit front cover to the assembly with the 2 x 316 Grade Stainless Steel Screws supplied.

NOTE: These Instructions should be read in conjunction with the Detailed Installation information sheet supplied with the PAL-2R Light

DWG. NO.  
VAU-02

REV.  
A