


# PAL-RLJ In-Line Joiner Kit Installation Instructions

ASSEMBLY AS SUPPLIED  
in 2RL1L & 2RL1P  
Replacement Light Kits




## STRIPING DETAILS FOR EXISTING LIGHT CABLE

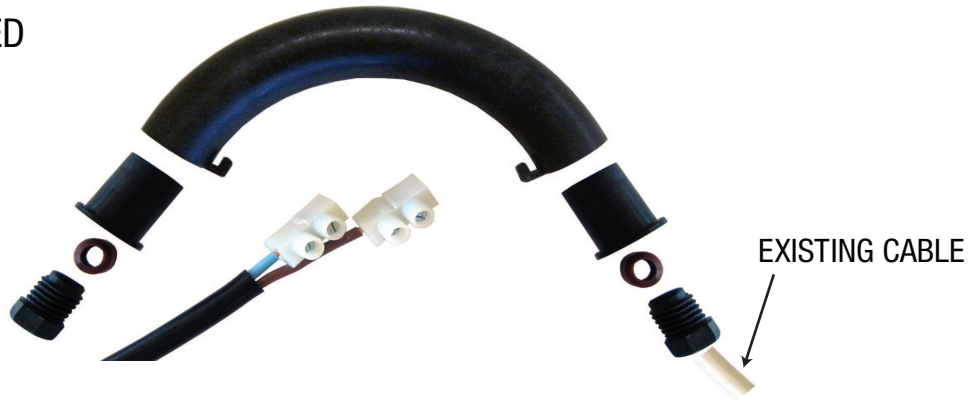

## CONNECT PAL-RL CABLE AND EXISTING LIGHT CABLE AS SHOWN

NOTE: SPACING OF PARTS

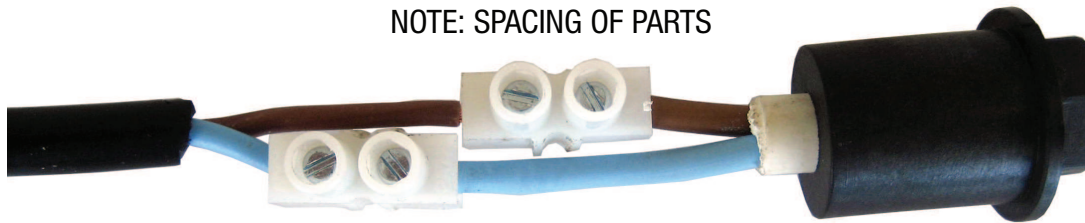

PAL-RLJ  
BODY (B)

Step 2

KEYWAY  
PINS

### IMPORTANT

ENSURE THE KEYWAY IN THE GLAND BODY (A) IS LOCATED INTO THE PAL-RLJ BODY (B) KEYWAY PINS WHEN THE PARTS ARE GLUED TOGETHER

**IMPORTANT NOTE:**  
BEFORE SEAL ASSEMBLY IS FITTED IT IS  
ESSENTIAL THAT THE JOINER HOUSING  
BE FILLED WITH SILICON


GLAND  
BODY (A)

Step 1

**NOTE:**  
LOCATE AND GLUE  
THIS SIDE FIRST

WHEN CABLE GLAND IS TIGHTENED AND POSITIONED AS SHOWN ON THE EXISTING CABLE, GLUE GLAND ① INTO TUBE WITH PVC GLUE. THE GLAND ② ON THE PAL-RL CAN THEN BE PUSHED DOWN AND GLUED INTO POSITION.

## ASSEMBLED IN-LINE JOINER KIT

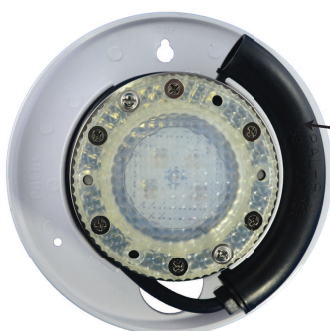

PAL-RLJ  
JOINER  
HOUSING  
ASSEMBLED  
IN PAL-RL BASE

EXISTING  
CABLE

PAL-RL  
CABLE

Publication No. P39-33AA

DWG. NO.  
**IJK-01**

REV.  
**C**